Product datasheet

HANCE DOWNLIGHT

HD2SR10SP840NW



HANCE G2 DOWN SEMIREC 1000 NW SP WH

Description:

LAMP multidirectional semi-recessed downlight HANCE G2 DOWN SEMIREC 1000. Allowing 355° rotation and tilting up to 85°. Body and frame made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 20° spot reflector. LED COB, 4000K and CRI80. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 78.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.



Finish: Texturised white RAL 9010

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.054 lm	°K :	4000
Plum:	8,6W	CRI :	80
Efficacy:	122,6 lm/w	R9 :	66
UGR:	<16	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	78.000 L80B10 (Ta=25ºC)	Gear:	Electronic
Power:	7W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light

Product datasheet


HANCE DOWNLIGHT

HD2SR10SP840NW

HANCE G2 DOWN SEMIREC 1000 NW SP WH



PHOTOMETRIC DATA :

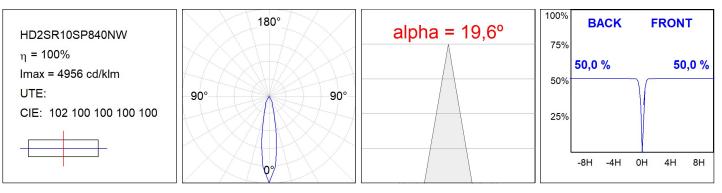

Worktitude for light

Product datasheet

HANCE DOWNLIGHT

ACCESORIES :

Optical



Product code: HSCU50

Description: HANCE 1000/2000 ACC. CUTTING BEAM



Product code: HSHO50

Description: HANCE 1000/2000 ACC. HONEYCOMB GRILLE



Product code:

HSRI65B

Description: HANCE 1000/2000 ACC. RING DECO BK.



Product code: HSRI65C

Description: HANCE 1000/2000 ACC. RING DECO CO.



Product code: HSRI65M





Product code: HSRI65W

Description: HANCE 1000/2000 ACC. RING DECO WH.



Product code: HSTR50

Description: HANCE 1000/2000 ACC. DIF TRANS

Data according to regulations 2019/2020/EU and 2019/2015/EU