



HM20605565OP830DW

**HERMETICA G2 600 5600 IP65 WW OPAL DA WH****Description:**

LAMP recessed mounted model HERMETICA G2 600 5600. Made of white lacquered sheet steel, with outer frame with bottom access. Diffuser OPAL made of PMMA for general light distribution. Model for MID-POWER LED, with colour temperature 3000K and CRI80. Electronic DALI gear included. IP65, IK06 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finish: White.

Dimensions: 616 x 616 x 96 mm**Weight:** 8.250 g**Installation:** Recessed**Recessing measures:** 588 x 588 x 0 mm**TECHNICAL SPECIFICATIONS:**

Light output:	4.390 lm	°K :	3000
Plum:	35W	CRI :	80
Efficacy:	125,4 lm/w	MacAdam:	3
Type:	MID POWER LED	Power Supply:	220-240V 50/60Hz
LED Lifetime:	>60.000 L80B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	30W		

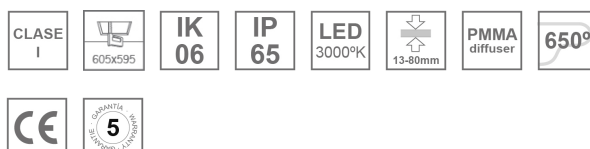Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

HM20605565OP830DW

HERMETICA G2 600 5600 IP65 WW OPAL DA WH

PHOTOMETRIC DATA :

