
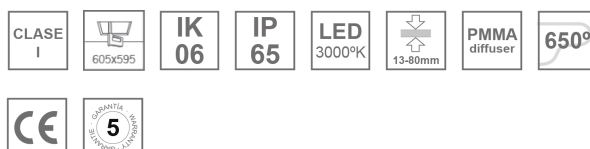


HM20605565PR830NW

**HERMETICA G2 600 5600 IP65 WW PRIS WH****Description:**

LAMP recessed mounted model HERMETICA G2 600 5600. Made of white lacquered sheet steel, with outer frame with bottom access. Diffuser PRISMATIC made of micro-prismatic PMMA to control light distribution and reduce glare UGR<19. Model for MID-POWER LED, with colour temperature 3000K and CRI80. Electronic ON OFF gear included. IP65, IK06 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finish: White.

Dimensions: 616 x 616 x 96 mm**Weight:** 8.250 g**Installation:** Recessed**Recessing measures:** 588 x 588 x 0 mm**TECHNICAL SPECIFICATIONS:****Light output:** 4.328 lm**°K :** 3000**Plum:** 34W**CRI :** 80**Efficacy:** 127,3 lm/w**MacAdam:** 3**UGR:** <19**Power Supply:** 220-240V 50/60Hz**Type:** MID POWER LED**Gear:** Electronic**LED Lifetime:** >60.000 L80B10 (Ta=25°C)**Power:** 30W**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

