



HM20605565PR840NW

**HERMETICA G2 600 5600 IP65 NW PRIS WH****Description:**

LAMP recessed mounted model HERMETICA G2 600 5600. Made of white lacquered sheet steel, with outer frame with bottom access. Diffuser PRISMATIC made of micro-prismatic PMMA to control light distribution and reduce glare UGR<19. Model for MID-POWER LED, with colour temperature 4000K and CRI80. Electronic ON OFF gear included. IP65, IK06 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finish: White.

Dimensions: 616 x 616 x 96 mm**Weight:** 8.250 g**Installation:** Recessed**Recessing measures:** 588 x 588 x 0 mm**TECHNICAL SPECIFICATIONS:**

Light output:	4.535 lm	%K :	4000
Plum:	34W	CRI :	80
Efficacy:	133,4 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Electronic
LED Lifetime:	>60.000 L80B10 (Ta=25°C)		
Power:	30W		

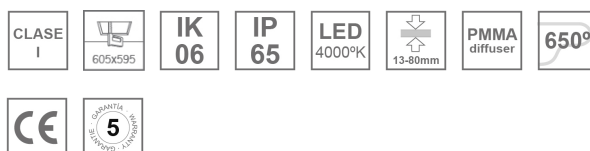Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

HM20605565PR840NW

HERMETICA G2 600 5600 IP65 NW PRIS WH

PHOTOMETRIC DATA :

