


## HM21205565OP840DW



## HERMETICA G2 1200 5600 IP65 NW OP DA WH

## Description:

LAMP recessed mounted model HERMÉTICA G2 1200 5600 IP65 Made of white lacquered sheet steel, with outer frame with bottom access. Diffuser OPAL made of PMMA for general light distribution. Model for MID-POWER LED, with colour temperature 4000K and CRI80. Electronic DALI gear included. IP65, IK06 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finish: White.


**Dimensions:** 1.186 x 366 x 96 mm

**Weight:** 11.000 g

**Installation:** Recessed

## TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	4.600 lm	<b>°K :</b>	4000
<b>Plum:</b>	35W	<b>CRI :</b>	80
<b>Efficacy:</b>	131,4 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	>60.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	30W		

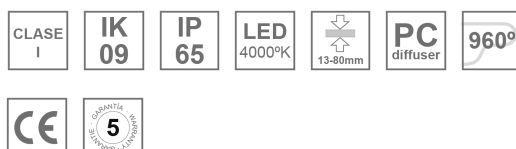*Light output tolerance +/- 10%*


## CUSTOM MADE OPTIONS:



HM21205565OP840DW

HERMETICA G2 1200 5600 IP65 NW OP DA WH

**PHOTOMETRIC DATA :**

