


## HM21205565PR830NW



## HERMETICA G2 1200 5600 IP65 WW PR WH

## Description:

LAMP recessed mounted model HERMÉTICA G2 1200 5600 IP65 Made of white lacquered sheet steel, with outer frame with bottom access. Diffuser PRISMATIC made of micro-prismatic PMMA to control light distribution and reduce glare UGR<19. Model for MID-POWER LED, with colour temperature 3000K and CRI80. Electronic ON OFF gear included. IP65, IK06 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finish: White.


**Dimensions:** 1.186 x 366 x 96 mm

**Weight:** 11.000 g

**Installation:** Recessed

## TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	4.328 lm	<b>°K :</b>	3000
<b>Plum:</b>	34W	<b>CRI :</b>	80
<b>Efficacy:</b>	127,3 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	MID POWER	<b>Gear:</b>	Electronic
<b>LED Lifetime:</b>	>60.000 L80 B10 (Ta=25°C)		
<b>Power:</b>	30W		

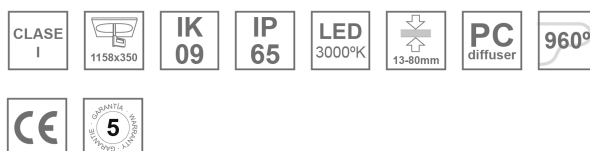*Light output tolerance +/- 10%*


## CUSTOM MADE OPTIONS:



HM21205565PR830NW

HERMETICA G2 1200 5600 IP65 WW PR WH

**PHOTOMETRIC DATA :**

