


HM21205565PR840DW



HERMETICA G2 1200 5600 IP65 NW PR DA WH

Description:

LAMP recessed mounted model HERMÉTICA G2 1200 5600 IP65 Made of white lacquered sheet steel, with outer frame with bottom access. Diffuser PRISMATIC made of micro-prismatic PMMA to control light distribution and reduce glare UGR<19. Model for MID-POWER LED, with colour temperature 4000K and CRI80. Electronic DALI gear included. IP65, IK06 ratings. Insulation Class I. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finish: White.


Dimensions: 1.186 x 366 x 96 mm

Weight: 11.000 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	4.535 lm	°K :	4000
Plum:	35W	CRI :	80
Efficacy:	129,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Adjustable DALI
LED Lifetime:	>60.000 L80 B10 (Ta=25°C)		
Power:	30W		

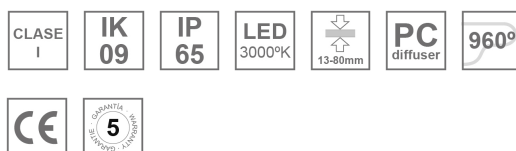Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:



HM21205565PR840DW

HERMETICA G2 1200 5600 IP65 NW PR DA WH

PHOTOMETRIC DATA :

