

HS2SF40MF840DW



HANCE G2 SUR 4000 NW MFL DALI WH

Description:

LAMP surface multidirectional spotlight HANCE G2 SUR 4000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 4000K and CRI80. Electronic DALI control gear included.IP20, IK07 ratings.Insulation Class I. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.



Finish: Texturised white RAL 9010

Installation: Surface

TECHNICAL SPECIFICATIONS:

| Light output: | 4.591 lm | ٩ κ : | 4000 |
|---------------|-------------------------|---------------|------------------|
| Plum: | 36,7W | CRI : | 80 |
| Efficacy: | 125,1 lm/w | R9 : | 64 |
| UGR: | <19 | MacAdam: | 3 |
| Туре: | СОВ | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 72.000 L80B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 33W | | |

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:






HS2SF40MF840DW

HANCE G2 SUR 4000 NW MFL DALI WH

PHOTOMETRIC DATA :

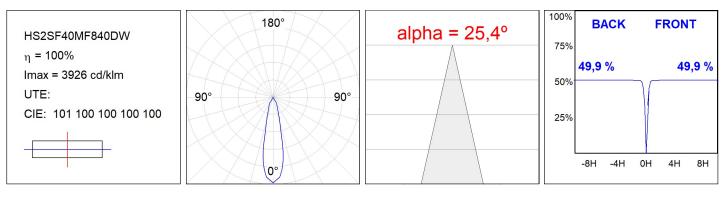



ACCESORIES :

Optical



Product code: HSSL50 Description: HANCE 1000/2000 ACC. SOFT LENS