


HS2SR10MF940NB

HANCE G2 SEMIREC 1000 9NW MFL BK
Description:

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 1000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 4000K y CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 78.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

Finish: Texturised black RAL 9011

Installation: Semi-Recessed

TECHNICAL SPECIFICATIONS:

Light output:	924 lm	°K :	4000
Plum:	8,6W	CRI :	90
Efficacy:	107,4 lm/w	R9 :	66
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	78.000 L80B10 (Ta=25°C)	Gear:	Electronic
Power:	7W		


Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:


HS2SR10MF940NB

HANCE G2 SEMIREC 1000 9NW MFL BK

PHOTOMETRIC DATA :

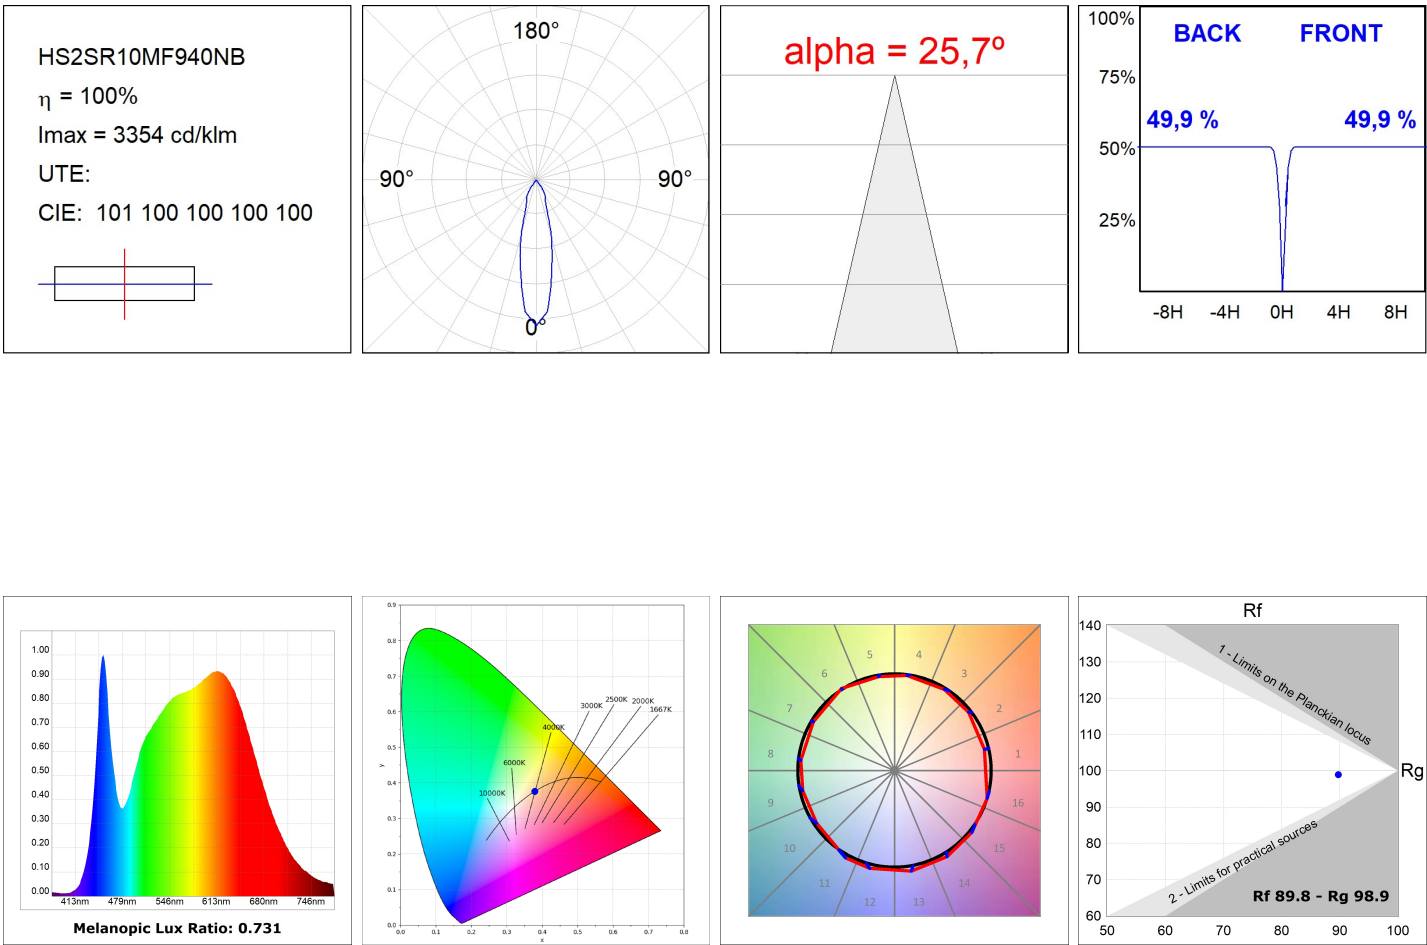

ACCESORIES :

Optical



Product code:

HSCU50

Description:

HANCE 1000/2000 ACC. CUTTING BEAM



Product code:

HSHO50

Description:

HANCE 1000/2000 ACC. HONEYCOMB GRILLE



Product code:

HSRI65C

Description:

HANCE 1000/2000 ACC. RING DECO CO.



Product code:

HSRI65M

Description:

HANCE 1000/2000 ACC. RING DECO MET.



Product code:

HSRI65W

Description:

HANCE 1000/2000 ACC. RING DECO WH.




Product code:

HSSL50

Description:

HANCE 1000/2000 ACC. SOFT LENS



Product code:

HSTR50

Description:

HANCE 1000/2000 ACC. DIF TRANS