


IR1SF5025VW840NB



IRON IP65 25000 NW VWFL BK.

Description:

Suspended industrial luminaire model IRON IP65 25000 NW VWFL BK. , LAMP brand. Made of extruded aluminium, with cataphoresis treatment and covers folded gray lacquered steel. Model for MID-POWER LED with neutral white temperature and control gear included. With polycarbonate diffuser high reflection Very Wide Flood . IP65, IK09 protection rating. Insulation class I. Fast connection system.

Finish: CATAPHORESIS

Weight: 11.358 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	23.038 lm	°K :	4000
Plum:	208W	CRI :	80
Efficacy:	110,8 lm/w	MacAdam:	3
Type:	MID POWER NICHIA	Power Supply:	100-277V 60Hz
LED Lifetime:	70.000 L80 B10	Gear:	Electronic
Power:	189W		


Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

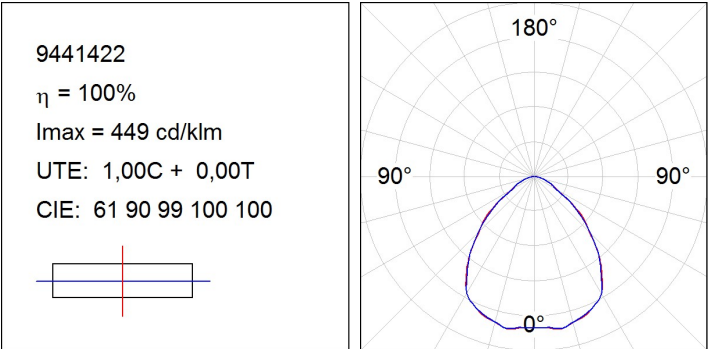

ACCESORIES :

Suspension



Product code:

SUWIDE1000G

SUWIDE4000G

Description:

ACC. QUICK STEEL CABLE 1M NK.

ACC. QUICK STEEL CABLE 4M NK.