

KOMBIC 100 DOWNLIGHT


K11RD1523RW927DBB

- KOM 100 RD 1500 IP23 9VWW RF WFL DA BK/B



Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic DALI wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low glare level UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: Matte black RAL 9011


Weight: 382 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.168 lm	°K :	2700
Plum:	14,2W	CRI :	90
Efficacy:	82,2 lm/w	R9 :	58
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%

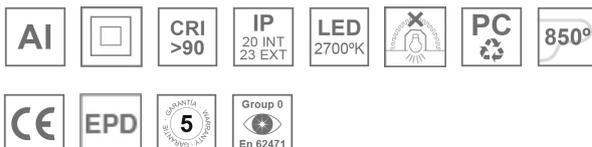

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD1523RW927DBB

KOM 100 RD 1500 IP23 9VWW RF WFL DA BK/B

PHOTOMETRIC DATA :

K11RD1523RW927DBB
 $\eta = 100\%$
 $I_{max} = 1293 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

