

KOMBIC 100 DOWNLIGHT

K11RD15400P927DWW



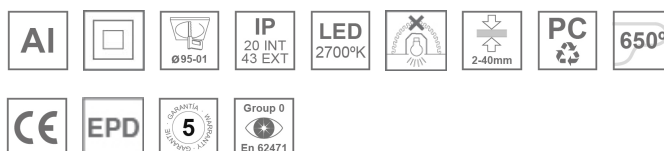
KOMBIC 100 RD 1500 IP43 9VWW OP DA WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 425 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.186 lm	°K :	2700
Plum:	13,4W	CRI :	90
Efficacy:	88,5 lm/w	R9 :	62
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	12W	Gear:	Adjustable DALI

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD1540OP927DWW

KOMBIC 100 RD 1500 IP43 9VWW OP DA WH/WH

PHOTOMETRIC DATA :

