

# KOMBIC 100 DOWNLIGHT


K11RD15400P930NRW



**KOMBIC 100 RD 1500 IP43 9WW OP BR/WH**

**Description:**

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety.



**Finish:** BRILLIANT METALLIC POLYCARBONATE


**Weight:** 392 g

**Installation:** Recessed

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.230 lm	<b>°K :</b>	3000
<b>Plum:</b>	13,4W	<b>CRI :</b>	90
<b>Efficacy:</b>	91,8 lm/w	<b>R9 :</b>	68
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Power:</b>	12W	<b>Gear:</b>	Electronic

*Light output tolerance +/- 10%*

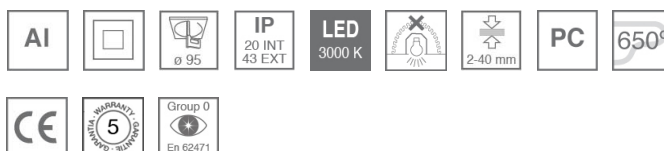

**CUSTOM MADE OPTIONS:**



# KOMBIC 100 DOWNLIGHT

K11RD15400P930NRW

KOMBIC 100 RD 1500 IP43 9WW OP BR/WH

**PHOTOMETRIC DATA :**

K11RD15400P930NRW  
 $\eta = 100\%$   
 $I_{max} = 974 \text{ cd/klm}$   
 UTE: 1,00A  
 CIE: 88 100 100 100 100

