


KOMBIC 100 DOWNLIGHT

K11RD15400P930NWW




KOMBIC 100 RD 1500 IP43 9WW OP WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety.

Finish: Matte white RAL 9010**Weight:** 392 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.225 lm | °K : | 3000 |
| Plum: | 13,4W | CRI : | 90 |
| Efficacy: | 91,4 lm/w | R9 : | 68 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 12W | Gear: | Electronic |

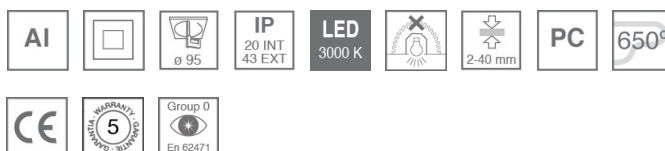Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD1540OP930NWW

KOMBIC 100 RD 1500 IP43 9WW OP WH/WH

PHOTOMETRIC DATA :

K11RD1540OP930NWW
 $\eta = 100\%$
 $I_{max} = 787 \text{ cd/klm}$
 UTE: 1,00B
 CIE: 76 93 99 100 100

