


KOMBIC 100 DOWNLIGHT

K11RD15400P935DRW



KOMBIC 100 RD 1500 IP43 935 OP DA BR/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3500K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE


Weight: 425 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.256 lm	°K :	3500
Plum:	13,4W	CRI :	90
Efficacy:	93,7 lm/w	R9 :	58
Type:	COB	MacAdam:	3
LED Lifetime:	>100.000 L90 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	12W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

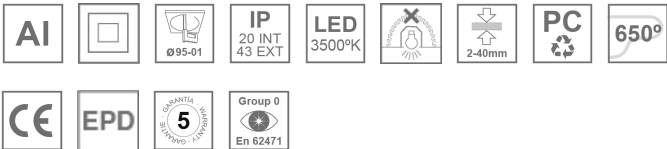

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD1540OP935DRW

KOMBIC 100 RD 1500 IP43 935 OP DA BR/WH

PHOTOMETRIC DATA :

