

KOMBIC 100 DOWNLIGHT

K11RD1540OP940NWW



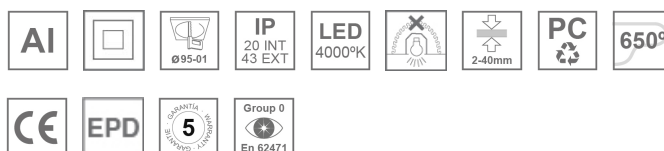
KOMBIC 100 RD 1500 IP43 9NW OP WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD 1500 IP40 9NW OP WH/WH, LAMP brand. Reflector made of polycarbonate. Interior reflector and frame in white finish, and optical film, die cast aluminium heat sink. Model for LED COB, with 4000K colour temperature, CRI90 and control gear included. IP43 protection rating. Insulation class II. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 392 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.330 lm	°K :	4000
Plum:	13,4W	CRI :	90
Efficacy:	99,3 lm/w	R9 :	66
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	12W	Gear:	Electronic

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD1540OP940NWW

KOMBIC 100 RD 1500 IP43 9NW OP WH/WH

PHOTOMETRIC DATA :

