

# KOMBIC 100 DOWNLIGHT

K11RD1540WF940DBW



## KOMBIC 100 RD 1500 IP43 9NW WFL DA BK/WH

### Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011


**Weight:** 442 g

**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.102 lm	<b>°K :</b>	4000
<b>Plum:</b>	13,4W	<b>CRI :</b>	90
<b>Efficacy:</b>	82,2 lm/w	<b>R9 :</b>	52
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	12W		

*Light output tolerance +/- 10%*

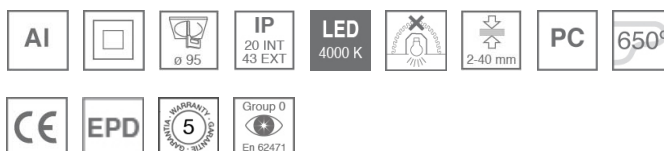

### CUSTOM MADE OPTIONS:



# KOMBIC 100 DOWNLIGHT

K11RD1540WF940DBW

KOMBIC 100 RD 1500 IP43 9NW WFL DA BK/WH

**PHOTOMETRIC DATA :**

K11RD1540WF940DBW  
 $\eta = 100\%$   
 $I_{max} = 1327 \text{ cd/klm}$   
 UTE:  
 CIE: 99 100 100 100 100

