

KOMBIC 100 DOWNLIGHT

K11RD1540WF940DMW



KOMBIC 100 RD 1500 IP43 9NW WFL DA MA/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate


Weight: 442 g

Installation: Semi-Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.102 lm	°K :	4000
Plum:	13,4W	CRI :	90
Efficacy:	82,2 lm/w	R9 :	52
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	12W		

Light output tolerance +/- 10%

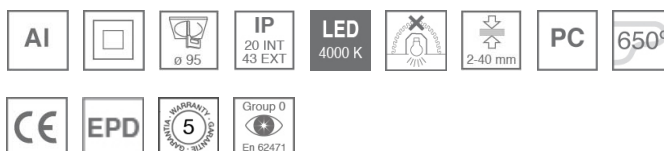

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD1540WF940DMW

KOMBIC 100 RD 1500 IP43 9NW WFL DA MA/WH

PHOTOMETRIC DATA :

K11RD1540WF940DMW
 $\eta = 100\%$
 $I_{max} = 1301 \text{ cd/klm}$
 UTE:
 CIE: 98 100 100 100 100

