

KOMBIC 100 DOWNLIGHT


K11RD1540WF940NBB



KOMBIC 100 RD 1500 IP43 9NW WFL BK/BK

Description:

Round recessed downlight model KOMBIC 100 RD 1500 IP43 9NW WFL BK/BK, LAMP brand. Reflector made of polycarbonate. Interior reflector and frame in black finish, injected die cast aluminium heat sink. Model for LED COB, neutral white colour temperature and control gear included. IP43 protection rating. Optic Wide Flood to achieve a controlled light distribution and low glare level, less than UGR 17. Insulation class II.



Finish: Matte black RAL 9011


Weight: 382 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.102 lm	°K :	4000
Plum:	13,4W	CRI :	90
Efficacy:	88,3 lm/w	R9 :	52
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	12W		

Light output tolerance +/- 10%

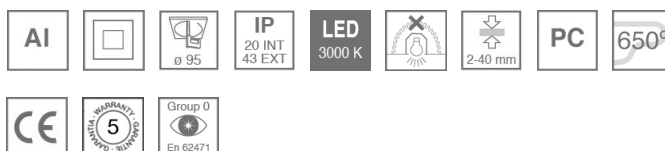

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD1540WF940NBB

KOMBIC 100 RD 1500 IP43 9NW WFL BK/BK

PHOTOMETRIC DATA :

K11RD1540WF940NBB
 $\eta = 100\%$
 $I_{max} = 1327 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

