

KOMBIC 100 DOWNLIGHT

K11RD1540WFWB3DWW



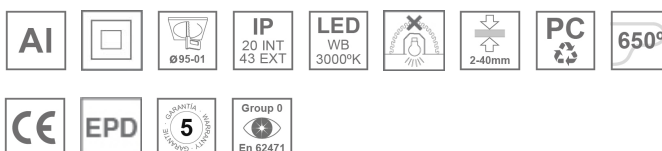
KOMBIC 100 RD 1200 IP43 WBW WFL DA WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI95. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 425 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.221 lm	°K :	3000
Plum:	13,5W	CRI :	95
Efficacy:	90,4 lm/w	R9 :	99
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	11,8W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD1540WFWB3DWW

KOMBIC 100 RD 1200 IP43 WBW WFL DA WH/WH

PHOTOMETRIC DATA :

