

# KOMBIC 100 DOWNLIGHT

K11RD1543EL927DMW

- KOMBIC 100 RD 1500 IP43 9VWW ELI. D MA/W




**Description:**

KOMBIC 100 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in matt metallic and frame in white finish. Elliptical optic option is the perfect choice for lighting walkways and longitudinal areas such as counters or areas adjacent to work areas. This product allows for increased spacing between luminaires, reducing the effect of residual light on walls and providing a pleasant atmosphere in the space. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CR190. Luminaire with electronic wiring Dali included. Insulation class II. LED life time: 50000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety.

**Finish:** metalized polycarbonate mate

**Weight:** 517 g




**Installation:** Recessed

**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.239 lm	<b>°K :</b>	2700
<b>Plum:</b>	13,7W	<b>CRI :</b>	90
<b>Efficacy:</b>	90,4 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	13W		

*Light output tolerance +/- 10%*

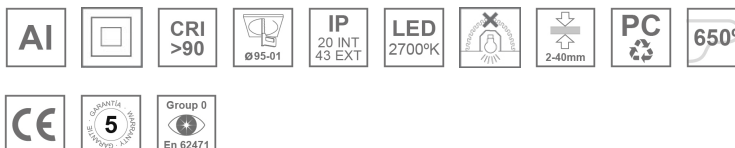

**CUSTOM MADE OPTIONS:**



# KOMBIC 100 DOWNLIGHT

K11RD1543EL927DMW

KOMBIC 100 RD 1500 IP43 9VWW ELI. D MA/W

**PHOTOMETRIC DATA :**

K11RD1543EL927DMW  
 $\eta = 101\%$   
 $I_{max} = 1940 \text{ cd/klm}$   
 UTE: 1,01A  
 CIE: 92 99 100 100 101

