# **KOMBIC 100 DOWNLIGHT**

#### K11RD2023RF927NBB



## KOMBIC 100 RD 2000 IP23 9VWW RF FL BK/BK

#### **Description:**

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low glare level UGR 17. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011

Weight: 382 g

Installation: Recessed

### **TECHNICAL SPECIFICATIONS:**

Light output:	1.711 lm	°K :	2700
Plum:	19,8W	CRI :	90
Efficacy:	86,4 lm/w	R9 :	58
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	19W		

#### Light output tolerance +/- 10%



# **CUSTOM MADE OPTIONS:**



Worktitude for light


# **KOMBIC 100 DOWNLIGHT**


K11RD2023RF927NBB

KOMBIC 100 RD 2000 IP23 9VWW RF FL BK/BK



## **PHOTOMETRIC DATA :**

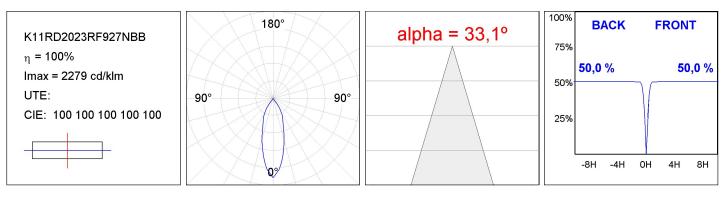

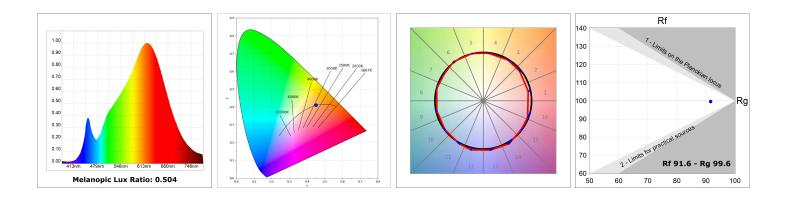

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es