

## KOMBIC 100 DOWNLIGHT

K11RD2023RF930NBB



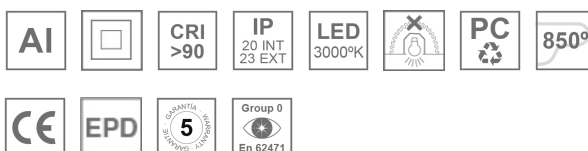
## KOMBIC 100 RD 2000 IP23 9WW RF FL BK/BK

**Description:**

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low glare level UGR 17. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011**Weight:** 382 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.785 lm                 | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 19,8W                    | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 90,1 lm/w                | <b>R9 :</b>          | 53               |
| <b>UGR:</b>          | <19                      | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 50.000 L80 B10 (Ta=25°C) | <b>Gear:</b>         | Electronic       |
| <b>Power:</b>        | 19W                      |                      |                  |

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2023RF930NBB

KOMBIC 100 RD 2000 IP23 9WW RF FL BK/BK

PHOTOMETRIC DATA :

