KOMBIC 100 DOWNLIGHT

K11RD2023RW927DBW


KOM 100 RD 2000 IP23 9VWW RF WFL DA B/W

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with DALI wiring included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Shiny white RAL 9010

Weight: 382 g



Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.568 lm	⁰K :	2700
Plum:	20,3W	CRI :	90
Efficacy:	77,2 lm/w	R9 :	58
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	19W	Gear:	Adjustable DALI

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


KOMBIC 100 DOWNLIGHT


K11RD2023RW927DBW

KOM 100 RD 2000 IP23 9VWW RF WFL DA B/W



PHOTOMETRIC DATA :

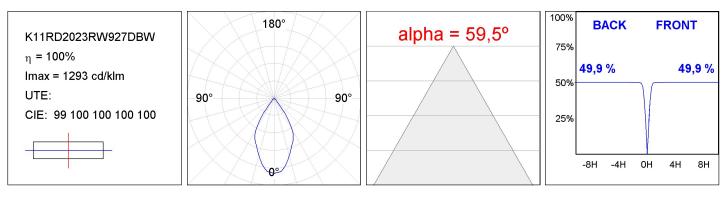

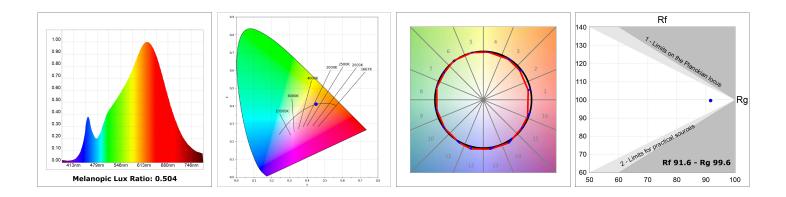

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es