


KOMBIC 100 DOWNLIGHT

K11RD20400P9TWDRW



KOMBIC 100 RD 2000 IP43 TW OPAL DA BR/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, with dynamic white colour temperature (2700-6500K) with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 70.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: BRILLIANT METALLIC POLYCARBONATE


Weight: 550 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Light output: | 1.349 lm | °K : | 2700-6500 |
| Plum: | 20,7W | CRI : | 90 |
| Efficacy: | 65,2 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 70.000 L80 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 16W | | |

Light output tolerance +/- 10%

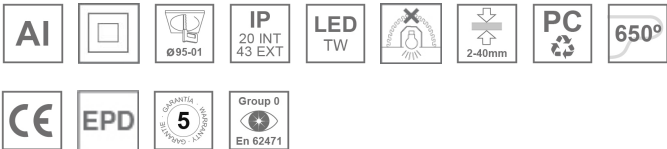

KOMBIC 100 DOWNLIGHT

K11RD20400P9TWDRW

KOMBIC 100 RD 2000 IP43 TW OPAL DA BR/WH

PHOTOMETRIC DATA :

