

KOMBIC 100 DOWNLIGHT

K11RD20400PWB4DWW



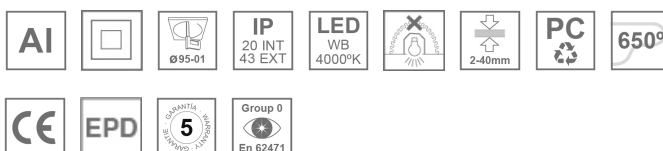
KOMBIC 100 RD 1800 IP43 WBN OP DA WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 4000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 425 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.398 lm	°K :	4000
Plum:	20W	CRI :	95
Efficacy:	69,9 lm/w	R9 :	99
Type:	COB	MacAdam:	3
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	17,2W	Gear:	Adjustable DALI

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD20400PWB4DWW

KOMBIC 100 RD 1800 IP43 WBN OP DA WH/WH

PHOTOMETRIC DATA :

