


KOMBIC 100 DOWNLIGHT

K11RD2040WFL840DMW




KOMBIC 100 RD 2000 IP43 NW WFL DA MA/WH

Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate**Weight:** 382 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.274 lm	°K :	4000
Plum:	10W	CRI :	80
Efficacy:	127,4 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)		
Power:	8,5W		

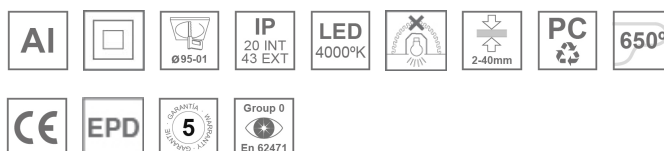Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2040WF840DMW

KOMBIC 100 RD 2000 IP43 NW WFL DA MA/WH

PHOTOMETRIC DATA :

