

## KOMBIC 100 DOWNLIGHT

K11RD2040WF840NBB



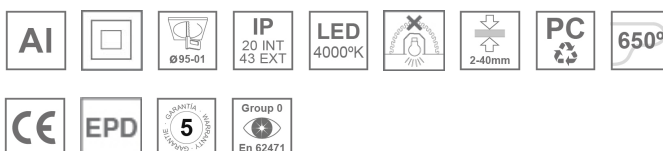
## KOMBIC 100 RD 2000 IP43 NW WFL BK/BK

**Description:**

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011**Weight:** 382 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                             |                      |                  |
|----------------------|-----------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.234 lm                    | <b>°K :</b>          | 4000             |
| <b>Plum:</b>         | 10W                         | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 123,4 lm/w                  | <b>MacAdam:</b>      | 3                |
| <b>UGR:</b>          | <19                         | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Type:</b>         | COB                         | <b>Gear:</b>         | Electronic       |
| <b>LED Lifetime:</b> | >100.000h L90 B10 (Ta=25°C) |                      |                  |
| <b>Power:</b>        | 8,5W                        |                      |                  |

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2040WF840NBB

KOMBIC 100 RD 2000 IP43 NW WFL BK/BK

PHOTOMETRIC DATA :

