

KOMBIC 100 DOWNLIGHT

K11RD2040WFL927NWW



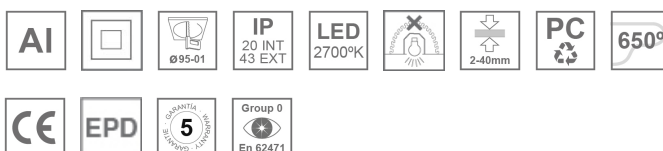
KOMBIC 100 RD 2000 IP43 9VWW WFL WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD 2000 IP43 9VWW WFL WH/WH, LAMP brand. Reflector made of polycarbonate. Interior reflector and frame in white finish, injected die cast aluminium heat sink. Model for LED COB, with warm white colour temperature and control gear included. IP43 protection rating. Optic Wide Flood to achieve a controlled light distribution and low UGR<19. Insulation class II. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 382 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.476 lm	°K :	2700
Plum:	20,3W	CRI :	90
Efficacy:	72,7 lm/w	R9 :	57
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	17W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2040WF927NWW

KOMBIC 100 RD 2000 IP43 9VWW WFL WH/WH

PHOTOMETRIC DATA :

