

KOMBIC 100 DOWNLIGHT


K11RD2040WF930DWW



KOMBIC 100 RD 2000 IP43 9WW WFL DA WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD 2500 IP43 9WW WFL DA WH/WH, LAMP brand. Reflector made of polycarbonate. Interior reflector and frame in white finish, injected die cast aluminium heat sink. Model for LED COB, with 3000K colour temperature and control DALI gear included. IP43 protection rating. Optic Wide Flood to achieve a controlled light distribution and low UGR<19. Insulation class II.



Finish: Matte white RAL 9010


Weight: 382 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.556 lm	°K :	3000
Plum:	20,3W	CRI :	90
Efficacy:	76,6 lm/w	R9 :	60
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	17W		

Light output tolerance +/- 10%

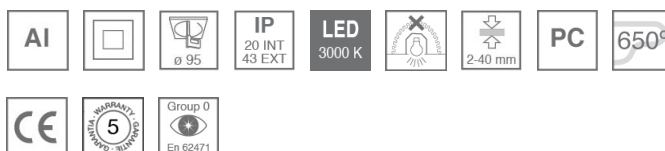

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD2040WF930DWW

KOMBIC 100 RD 2000 IP43 9WW WFL DA WH/WH

PHOTOMETRIC DATA :

K11RD2040WF930DWW
 $\eta = 100\%$
 $I_{max} = 1265 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 95 99 100 100 100

