

KOMBIC 100 DOWNLIGHT

K11RD2040WFL940DBB



KOMBIC 100 RD 2000 IP43 9NW WFL DA BK/BK

Description:

Round recessed downlight model KOMBIC 100 RD 2000 IP43 9NW WFL DA BK/BK, LAMP brand. Reflector made of polycarbonate. Interior reflector and frame in black finish, injected die cast aluminium heat sink. Model for LED COB, with neutral white colour temperature and control DALI gear included. IP43 protection rating. Optic Wide Flood to achieve a controlled light distribution and low glare level, less than UGR 17. Insulation class II. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011


Weight: 442 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.552 lm	°K :	4000
Plum:	20,3W	CRI :	90
Efficacy:	76,4 lm/w	R9 :	66
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	18W		

Light output tolerance +/- 10%

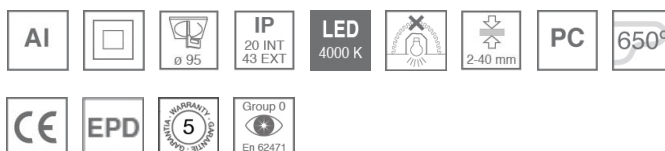

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD2040WF940DBB

KOMBIC 100 RD 2000 IP43 9NW WFL DA BK/BK

PHOTOMETRIC DATA :

K11RD2040WF940DBB
 $\eta = 100\%$
 $I_{max} = 1327 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

