

KOMBIC 100 DOWNLIGHT

K11RD2040WF9TWDBB



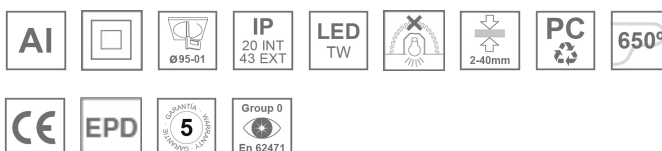
KOMBIC 100 RD 2000 IP43 TW WFL DA BK/BK

Description:

Recessed round downlight model KOMBIC 100 RD from the Lamp brand. Reflector made of recycled R-PC FR WHITE TM polycarbonate with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in black color and frame in black finish. Heatsink made of aluminum injection. COB LED with TW white color temperature (2700K to 6500K) with CRI90. Luminaire with Dali DT8 electronic equipment included. Insulation class II. Hours of life: 86,000 L80 B10. With an IP43 protection degree. Photobiological safety group 0. With Wide Flood optics for control of UGR<19 light distribution and UGR<19 glare. Environmental Product Declaration - EPD (EPD®) available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015 standards.

Finish: Matte black RAL 9011**Weight:** 550 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.719 lm	°K :	2700-6500
Plum:	20W	CRI :	95
Efficacy:	86 lm/w	R9 :	91
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	86.000h L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	16,5W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2040WF9TWDBB

KOMBIC 100 RD 2000 IP43 TW WFL DA BK/BK

PHOTOMETRIC DATA :

