


## KOMBIC 100 DOWNLIGHT

K11RD2040WF9TWDWW




## KOMBIC 100 RD 2000 IP43 TW WFL DA WH/WH

**Description:**

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, with dynamic white colour temperature (2700-6500K) with CRI90. Luminaire with electronic wiring Dali DT8 included. Insolation Class II. Lifetime: 70.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**Weight:** 550 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.747 lm	<b>°K :</b>	2700-6500
<b>Plum:</b>	20W	<b>CRI :</b>	95
<b>Efficacy:</b>	87,4 lm/w	<b>R9 :</b>	91
<b>UGR:</b>	<19	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	86.000h L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	16,5W		

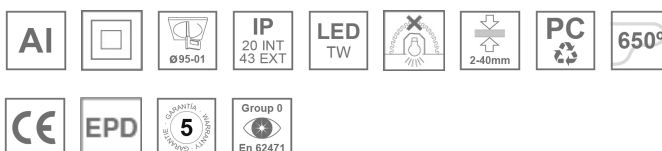**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2040WF9TWDWW

KOMBIC 100 RD 2000 IP43 TW WFL DA WH/WH

PHOTOMETRIC DATA :

