


## KOMBIC 100 DOWNLIGHT

K11RD2040WFWB3DWW




## KOMBIC 100 RD 1800 IP43 WBW WFL DA WH/WH

**Description:**

Recessed round downlight model KOMBIC 100 RD from the Lamp brand. Reflector made of recycled R-PC FR WHITE TM polycarbonate with bromine-free flame retardant. Flammability grade V0 according to UL94. Interior reflector finished in white color and frame in white finish. Heatsink made of aluminum injection. Model for COB LED WELLBEING technology with 3000K color temperature and CRI95. Wide flood optics for control of light distribution and glare UGR<19. Dali electronic equipment included. Insulation class II. Hours of life: 86,000 L80 B10. With an IP43 protection degree. Photobiological safety group 0. Available finishes: White, black and matte metallic. Environmental Product Declaration - EPD (EPD®) available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015 standards.

**Finish:** Matte white RAL 9010**Weight:** 442 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                           |                      |                  |
|----------------------|---------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.662 lm                  | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 19,5W                     | <b>CRI :</b>         | 95               |
| <b>Efficacy:</b>     | 84,4 lm/w                 | <b>R9 :</b>          | 99               |
| <b>UGR:</b>          | <19                       | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                       | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 86.000h L80 B10 (Ta=25°C) | <b>Gear:</b>         | Adjustable DALI  |
| <b>Power:</b>        | 17,2W                     |                      |                  |

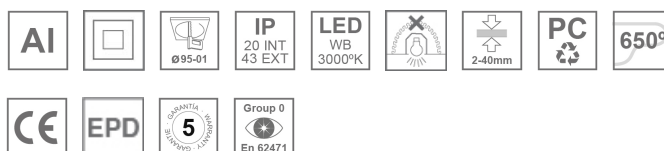**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT



K11RD2040WFWB3DWW

KOMBIC 100 RD 1800 IP43 WBW WFL DA WH/WH

PHOTOMETRIC DATA :

