


KOMBIC 100 DOWNLIGHT

K11RD2043WW930DBW



KOMBIC 100 RD 2000 IP43 9WW WW DA BK/WH

Description:

KOMBIC 100 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in black and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring dali included. Insulation class II. LED lifetime: 50000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. WALL WASHER optics to control light distribution towards the vertical surface without dark areas.

Finish: Matte black RAL 9011


Weight: 517 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.262 lmw | °K : | 3000 |
| Plum: | 19,8W | CRI : | 90 |
| Efficacy: | 63,7 lm/w | R9 : | 60 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 19W | Gear: | Adjustable DALI |

Light output tolerance +/- 10%

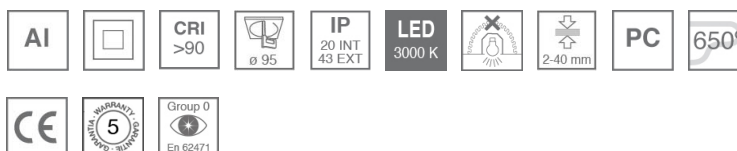

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD2043WW930DBW

KOMBIC 100 RD 2000 IP43 9WW WW DA BK/WH

PHOTOMETRIC DATA :

K11RD2043WW930DBW
 $\eta = 100\%$
 $I_{max} = 1366 \text{ cd/klm}$
 UTE: 1,00B
 CIE: 79 100 100 100 100

