

## KOMBIC 100 DOWNLIGHT

K11RD2043WW935DBB



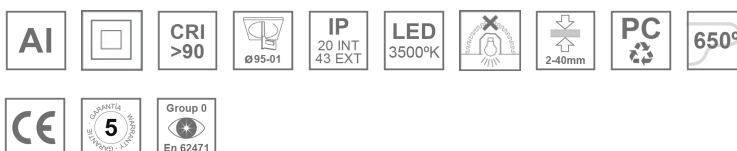
## KOMBIC 100 RD 2000 IP43 935 WW DA BK/BK

**Description:**

LAMP Round recessed downlight KOMBIC 100 RD 2000 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 3500K and CRI90. Electronic DALI gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: >100.000 L85 B10. Available finishes: White and black. Environmental Product Declaration - EPD® available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011**Weight:** 517 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                            |                      |                  |
|----------------------|----------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.289 lm                   | <b>°K :</b>          | 3500             |
| <b>Plum:</b>         | 19,8W                      | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 65,1 lm/w                  | <b>R9 :</b>          | 61               |
| <b>Type:</b>         | COB                        | <b>MacAdam:</b>      | 3                |
| <b>LED Lifetime:</b> | >100.000 L85 B10 (Ta=25°C) | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Power:</b>        | 19W                        | <b>Gear:</b>         | Adjustable DALI  |

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2043WW935DBB

KOMBIC 100 RD 2000 IP43 935 WW DA BK/BK

PHOTOMETRIC DATA :

