

KOMBIC 100 DOWNLIGHT

K11RD2043WW940DMW



KOMBIC 100 RD 2000 IP43 9NW WW DA MA/WH

Description:

KOMBIC 100 round recessed downlight by LAMP. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in matte metallic and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring dali included. Insulation class II. LED lifetime: 50000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. WALL WASHER optics to control light distribution towards the vertical surface without dark areas.

Finish: metalized polycarbonate mate


Weight: 517 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.816 lm	°K :	4000
Plum:	19,8W	CRI :	90
Efficacy:	91,7 lm/w	R9 :	50
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	19W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

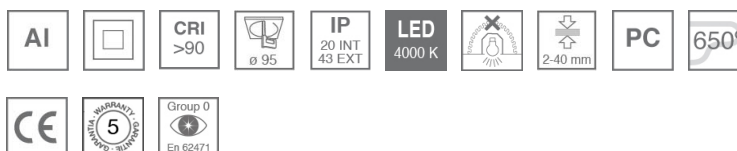

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11RD2043WW940DMW

KOMBIC 100 RD 2000 IP43 9NW WW DA MA/WH

PHOTOMETRIC DATA :

K11RD2043WW940DMW
 $\eta = 100\%$
 $I_{max} = 1058 \text{ cd/klm}$
 UTE: 1,00C
 CIE: 70 93 99 100 100

