


## KOMBIC 100 DOWNLIGHT

K11RD2065OP830DWW




## KOMBIC 100 RD 2000 IP65 WW OPAL DA WH/WH

**Description:**

Round recessed downlight model KOMBIC 100 RD 2000 IP65 WW OPAL DALI WH/WH LAMP brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Reflector made of polycarbonate. Interior reflector and frame in white finish, and optical film, die cast aluminium heat sink. Model for LED COB, with 3000K colour temperature, CRI80 and control DALI gear included. IP65 protection rating. Insulation class II. Group 0 photobiological safety. Lifetime: 50.000h L80 B10.

**Finish:** Matte white RAL 9010**Weight:** 517 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.454 lm	<b>°K :</b>	3000
<b>Plum:</b>	13,4W	<b>CRI :</b>	80
<b>Efficacy:</b>	108,5 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	13W		

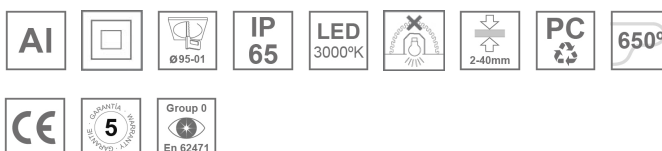**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2065OP830DWW

KOMBIC 100 RD 2000 IP65 WW OPAL DA WH/WH

PHOTOMETRIC DATA :

