


# KOMBIC 100 DOWNLIGHT

K11RD25400P830DRW



## KOMBIC 100 RD 2500 IP43 WW OPAL DA BR/WH

### Description:

Round recessed downlight model KOMBIC 100 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** BRILLIANT METALLIC POLYCARBONATE


**Weight:** 392 g

**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.959 lm	<b>°K :</b>	3000
<b>Plum:</b>	19,1W	<b>CRI :</b>	80
<b>Efficacy:</b>	102,6 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	17W		

*Light output tolerance +/- 10%*

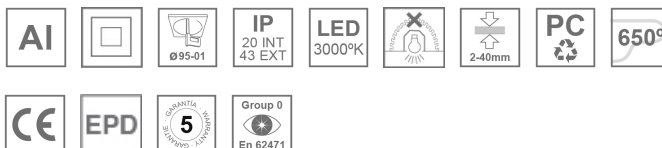

### CUSTOM MADE OPTIONS:



# KOMBIC 100 DOWNLIGHT

K11RD2540OP830DRW

KOMBIC 100 RD 2500 IP43 WW OPAL DA BR/WH

## PHOTOMETRIC DATA :

K11RD2540OP830NRW  
 $\eta = 100\%$   
 $I_{max} = 974 \text{ cd/klm}$   
UTE: 1,00A  
CIE: 88 100 100 100 100

