


KOMBIC 100 DOWNLIGHT

K11RD2565OP840DWW




KOMBIC 100 RD 2500 IP65 NW OPAL DA WH/WH

Description:

Round recessed downlight model KOMBIC 100 RD 2500 IP65 NW OPAL DA WH/WH , LAMP brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Reflector made of polycarbonate. Matte white interior reflector and frame in white finish, and optical film, die cast aluminium heat sink. Model for LED COB, with 4000K colour temperature, CRI80 and control DALI gear included. IP65 protection rating. Insulation class II. Group 0 photobiological safety. Lifetime: 50.000h L80 B10.

Finish: Matte white RAL 9010**Weight:** 517 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	2.067 lm	°K :	4000
Plum:	19,1W	CRI :	80
Efficacy:	108,2 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		

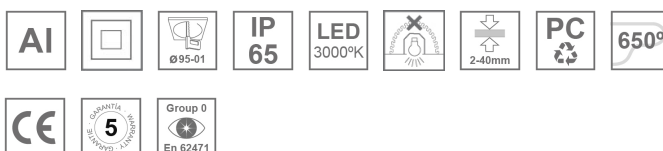Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RD2565OP840DWW

KOMBIC 100 RD 2500 IP65 NW OPAL DA WH/WH

PHOTOMETRIC DATA :

