

KOMBIC 100 DOWNLIGHT

K11RO2540WF840DWW



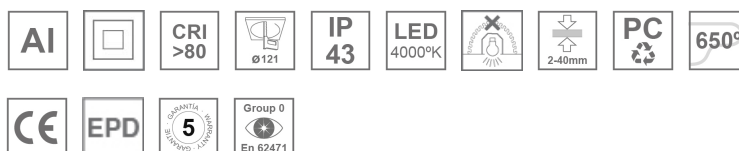
KOMBIC 100 RO 2500 IP43 WFL NW DA W/W

Description:

Adjustable recessed downlight model KOMBIC 100 RO 2500 from the brand LAMP. Aluminum injection frame and R-PC FR WHITE TM recycled polycarbonate reflector with bromine-free flame retardant. Flammability degree V0 according to UL94. Interior reflector finished in white. Adjustable luminaire +/-20° with wide flood optics for greater efficiency and control of light distribution and reduction of UGR<19 glare. Aluminum injection heat sink with cataphoresis treatment for greater thermal stability. COB LED, with 4000K color temperature with CRI90. DALI electronic equipment included. With an IP43 degree of protection. Insulation class II. Photobiological safety group 0. Hours of life: >100.000 L90 B10. Finished in black and white.

Finish: Matte white RAL 9010**Weight:** 545 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.765 lm	°K :	4000
Plum:	14W	CRI :	80
Efficacy:	126,1 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	>100.000 L90 B10 (Ta=25°C)		
Power:	12W		

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11RO2540WF840DWW

KOMBIC 100 RO 2500 IP43 WFL NW DA W/W

PHOTOMETRIC DATA :

