KOMBIC 100 SURFACE

K11SF1523RF927DWB

- KOM 100 SF 1500 IP23 9VWW RF FL DA WH/BK

Description:

Finish: Matte Traffic white RAL 9016 Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.325 lm	٩ Κ :	2700
Plum:	13,9W	CRI :	90
Efficacy:	95,3 lm/w	R9 :	58
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%

EPD




KOMBIC 100 SURFACE


K11SF1523RF927DWB

KOM 100 SF 1500 IP23 9VWW RF FL DA WH/BK



PHOTOMETRIC DATA :

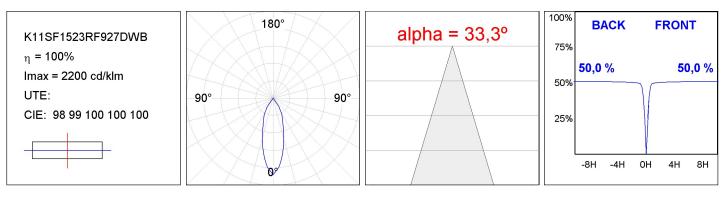

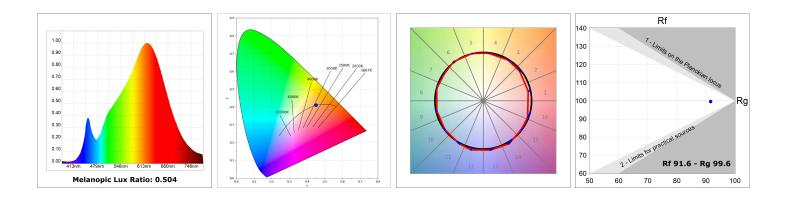

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light