KOMBIC 100 SURFACE

K11SF1523RF927DWW





KOM 100 SF 1500 IP23 9VWW RF FL DA WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic DALI wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011

Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

1.325 lm	٥K :	2700
13,9W	CRI :	90
95,3 lm/w	R9 :	58
<19	MacAdam:	3
СОВ	Power Supply:	220-240V 50/60Hz
50.000 L80 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
13W		
	13,9W 95,3 lm/w <19 COB 50.000 L80 B10 (Ta=25°C)	13,9W CRI : 95,3 lm/w R9 : <19 MacAdam: COB Power Supply: 50.000 L80 B10 (Ta=25°C) Gear:

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


KOMBIC 100 SURFACE


K11SF1523RF927DWW

KOM 100 SF 1500 IP23 9VWW RF FL DA WH/WH



PHOTOMETRIC DATA :

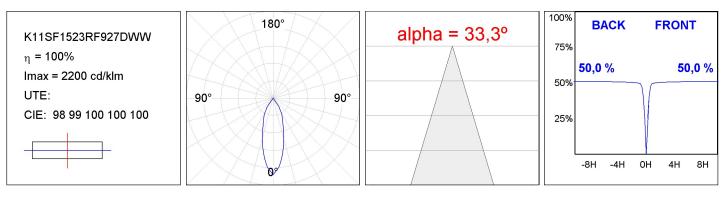

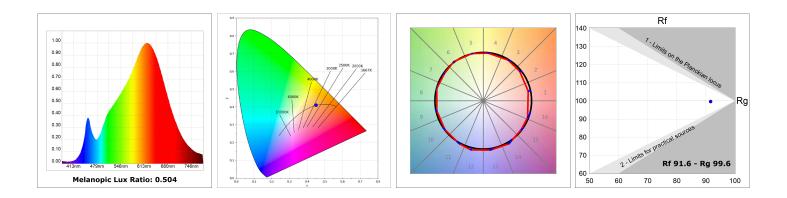

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light