KOMBIC 100 SURFACE

K11SF1523RF930DMB

- KOMBIC 100 SF 1500 IP23 9WW RF FL DA M/B

Description:

Finish: metalized polycarbonate mate Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.382 lm	°K :	3000	
Plum:	13,9W	CRI :	90	
Efficacy:	99,4 lm/w	MacAdam:	3	
UGR:	<19	Power Supply:	220-240V 50/60Hz	
Туре:	COB	Gear:	Adjustable DALI	
LED Lifetime:	50.000 L80 B10 (Ta=25°C)			
Power:	13W			

Light output tolerance +/- 10%

EPD




KOMBIC 100 SURFACE


K11SF1523RF930DMB

KOMBIC 100 SF 1500 IP23 9WW RF FL DA M/B



PHOTOMETRIC DATA :

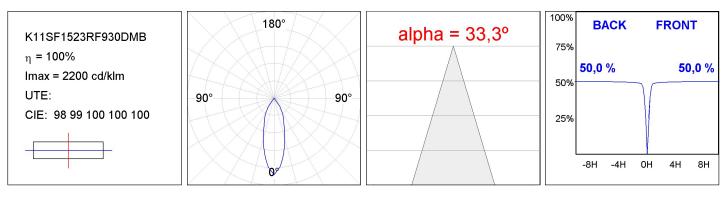

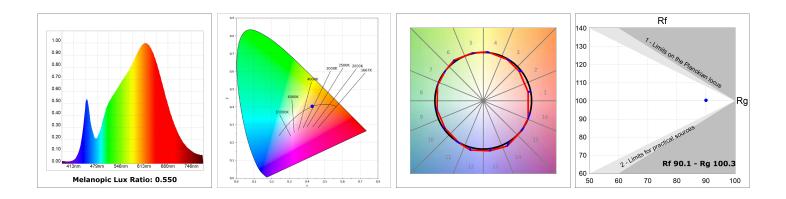

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light