

K11SF1523RF940DBB

- KOMBIC 100 SF 1500 IP23 9NW RF FL DA B/B

Description:**Finish:** Matte black RAL 9011**Weight:** 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.416 lm	°K :	4000
Plum:	13,9W	CRI :	90
Efficacy:	101,8 lm/w	R9 :	65
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%





KOMBIC 100 SURFACE

K11SF1523RF940DBB

KOMBIC 100 SF 1500 IP23 9NW RF FL DA B/B

PHOTOMETRIC DATA :

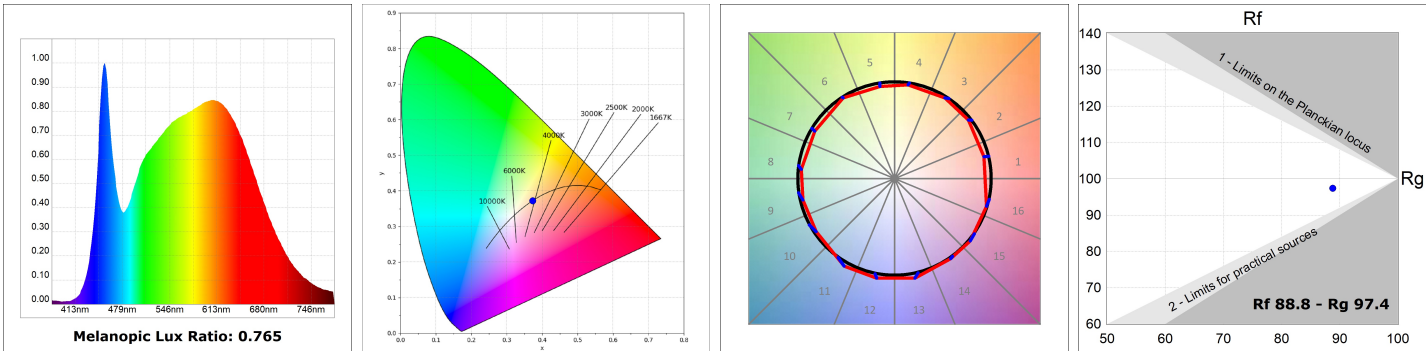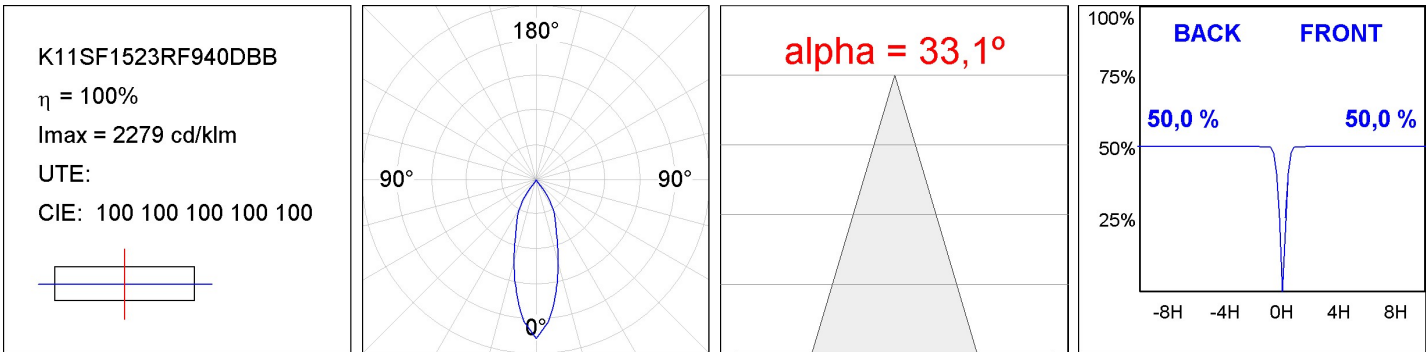

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH