

KOMBIC 100 SURFACE

K11SF1523RF940DWB

- KOMBIC 100 SF 1500 IP23 9NW RF FL DA W/B

Description:**Finish:** Matte white RAL 9010**Weight:** 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:



| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.474 lm | °K : | 4000 |
| Plum: | 13,9W | CRI : | 90 |
| Efficacy: | 106 lm/w | R9 : | 65 |
| UGR: | <19 | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 13W | | |

Light output tolerance +/- 10%



K11SF1523RF940DWB KOMBIC 100 SF 1500 IP23 9NW RF FL DA W/B

PHOTOMETRIC DATA :

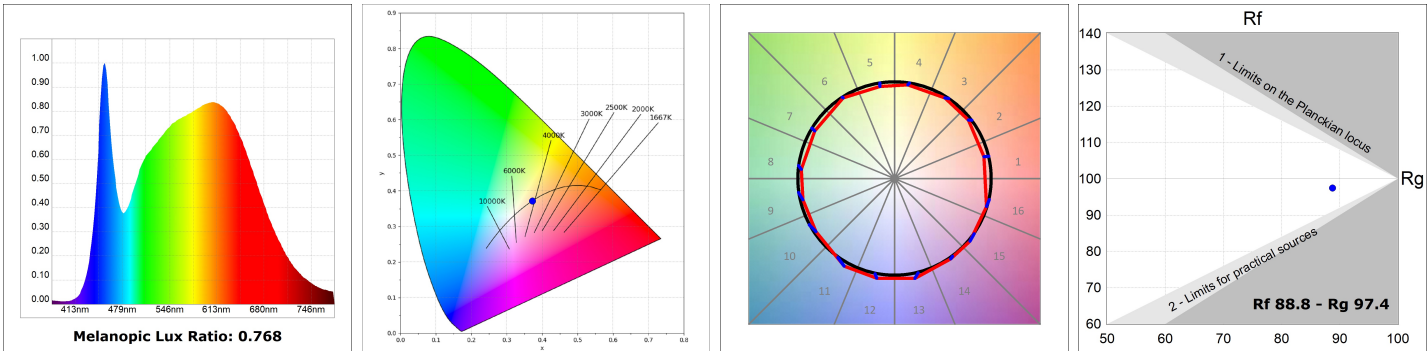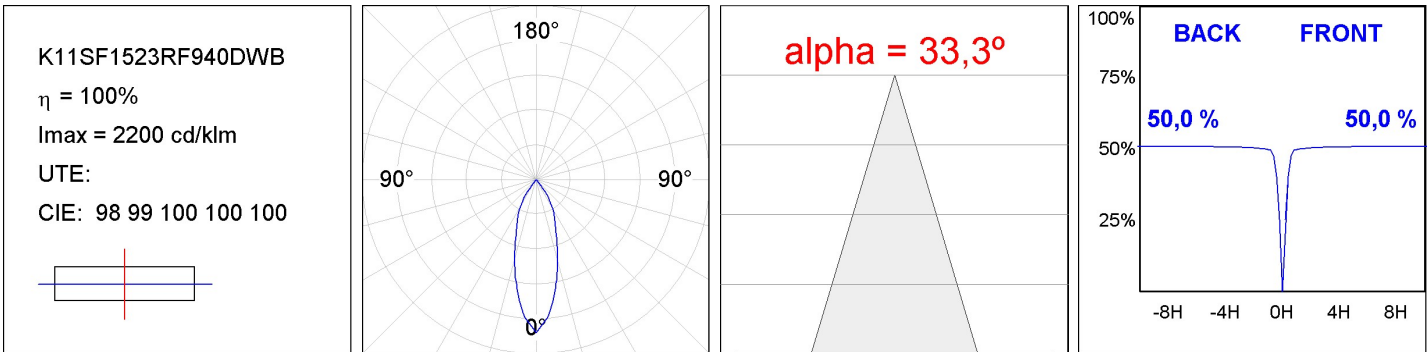

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH