Product datasheet

KOMBIC 100 SURFACE

LAMP
Worktitude for light

K11SF1523RW927DBB   -   **KOM 100 SF 1500 IP23 9VWW RF WFL DA B/B**
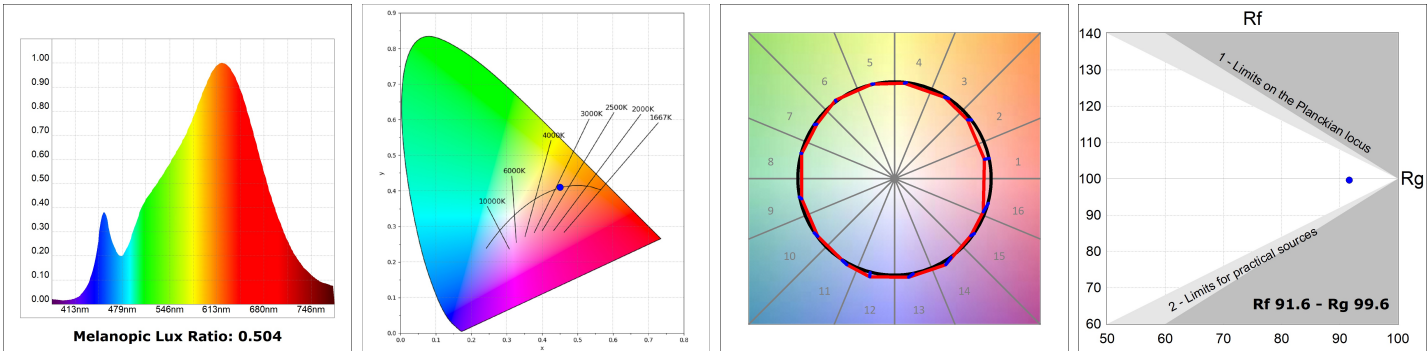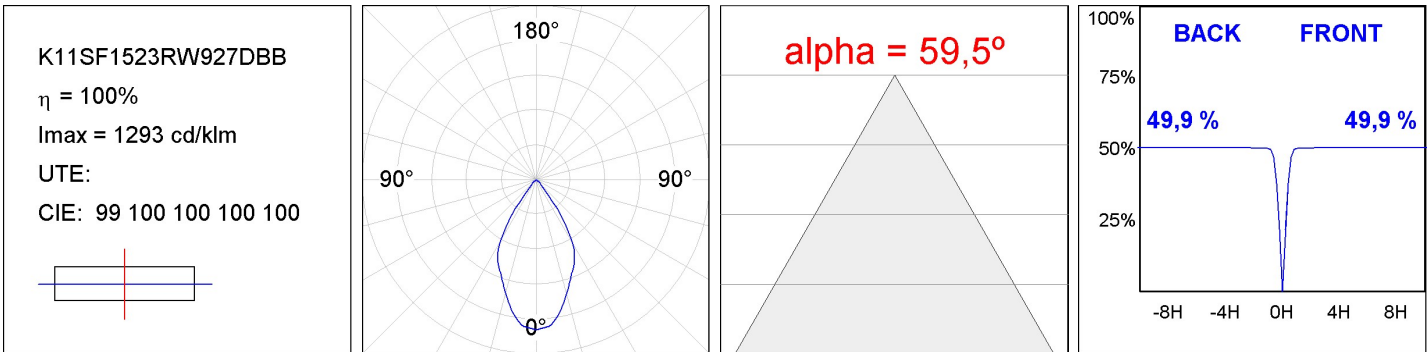
Description:

Finish: Matte black RAL 9011

Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.168 lm	**ºK :**	2700
Plum:	13,9W	**CRI :**	90
Efficacy:	84 lm/w	**R9 :**	58
UGR:	<19	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	**Gear:**	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%

EPD

K11SF1523RW927DBB   **KOM 100 SF 1500 IP23 9VWW RF WFL DA B/B**

PHOTOMETRIC DATA :

K11SF1523RW927DBB

η = 100%

Imax = 1293 cd/klm

UTE:

CIE: 99 100 100 100 100

180°

90°   90°

0°

alpha = 59,5º

100%
75%   BACK   FRONT
49,9 %   **49,9 %**
50%
25%

-8H   -4H   0H   4H   8H

Melanopic Lux Ratio: 0.504

413nm 479nm 546nm 613nm 680nm 746nm

3000K 2500K 2000K
4000K   1667K
6000K
10000K

Rf
140
130
120   1 - Limits on the Planckian locus
110
100   Rg
90
80   2 - Limits for practical sources
70
60   **Rf 91.6 - Rg 99.6**
50   60   70   80   90   100

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

12-03-2025

Pág.   2 / 3

Data according to regulations 2019/2020/EU and 2019/2015/EU

LAMP
Worktitude for light

ACCESORIES :

Suspension

Product code:

K11SUADLATBK

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE BK

Product code:

K11SUADLATWH

Description:

KOMBIC 100 SF ADAPT. LATERAL CABLE WH