

KOMBIC 100 SURFACE

K11SF1523RW927NMB

- KOMBIC 100 SF 1500 IP23 9VWW RF WFL M/B

Description:**Finish:** metalized polycarbonate mate**Weight:** 502 g

Installation: Surface

TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.264 lm | °K : | 2700 |
| Plum: | 14,1W | CRI : | 90 |
| Efficacy: | 89,6 lm/w | R9 : | 58 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 13W | Gear: | Electronic |



Light output tolerance +/- 10%



K11SF1523RW927NMB

KOMBIC 100 SF 1500 IP23 9VWW RF WFL M/B

PHOTOMETRIC DATA :

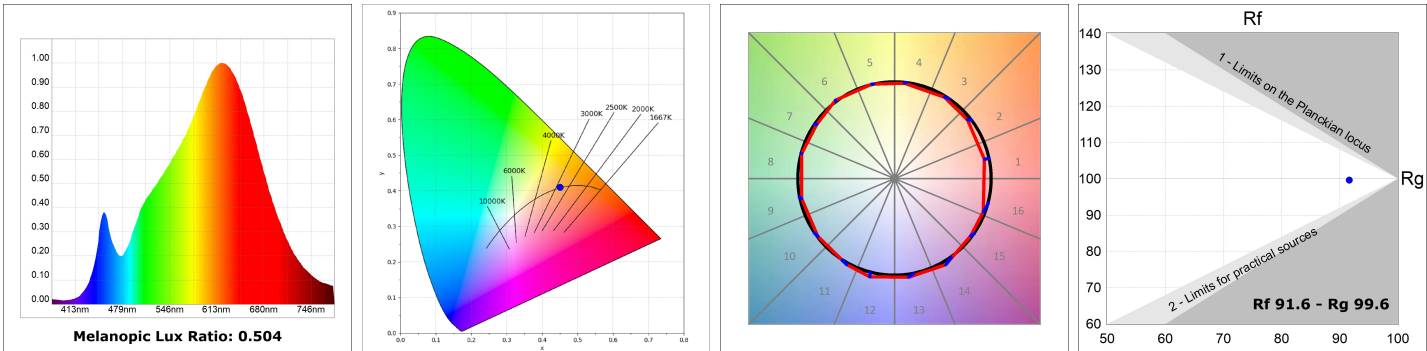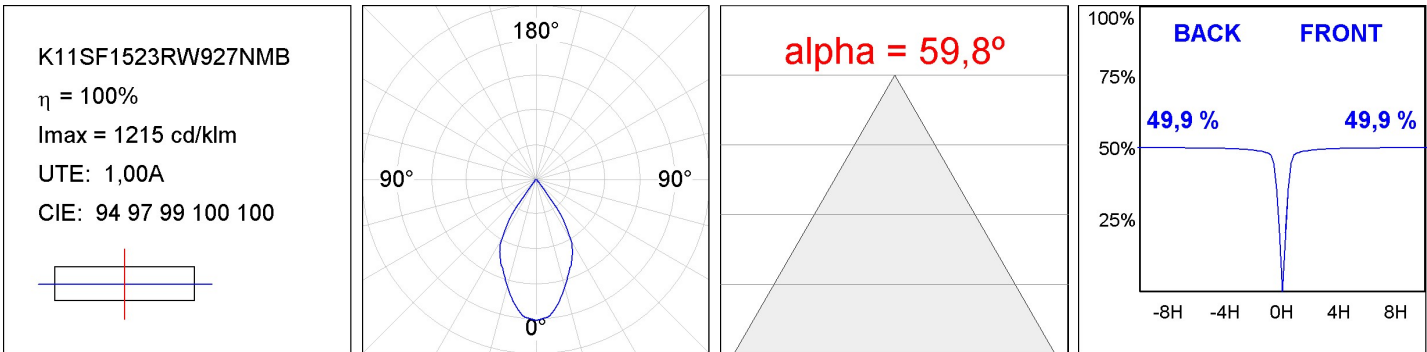

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH