

KOMBIC 100 SURFACE

K11SF1523RW930DWW

- KOM 100 SF 1500 IP23 9WW RF WFL DA WH/WH

**Description:****Finish:** Matte Traffic white RAL 9016**Weight:** 712 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 1.318 lm | °K : | 3000 |
| Plum: | 13,9W | CRI : | 90 |
| Efficacy: | 94,8 lm/w | R9 : | 53 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 13W | Gear: | Adjustable DALI |



Light output tolerance +/- 10%

KOMBIC 100 SURFACE

K11SF1523RW930DWW

KOM 100 SF 1500 IP23 9WW RF WFL DA WH/WH

PHOTOMETRIC DATA :

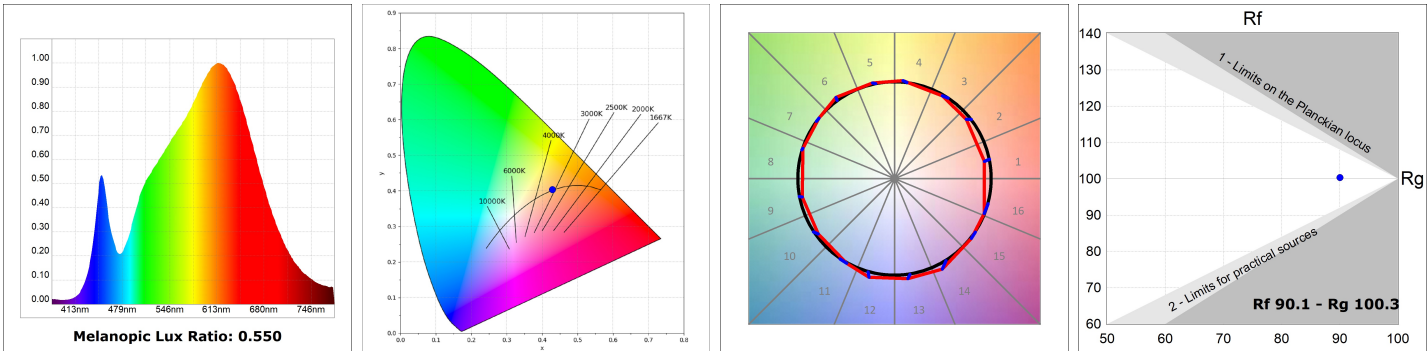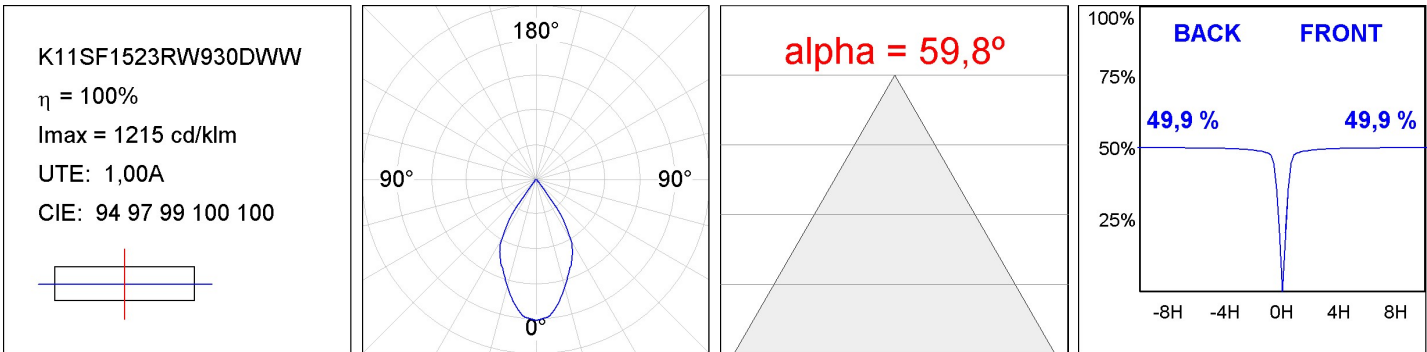

ACCESORIES :

Suspension



Product code:
K11SUADLATBK

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:
K11SUADLATWH

Description:
KOMBIC 100 SF ADAPT. LATERAL CABLE WH