KOMBIC 100 SURFACE

K11SF1523RW940DMW

- KOM 100 SF 1500 IP23 9NW RF WFL DA MA/WH

Description:

Finish: Matte Traffic white RAL 9016 Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.406 lm	⁰К:	4000
Plum:	13,9W	CRI :	90
Efficacy:	101,1 lm/w	R9 :	65
Туре:	СОВ	MacAdam:	3
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	Power Supply:	220-240V 50/60Hz
Power:	13W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

EPD

Worktitude for light


KOMBIC 100 SURFACE


K11SF1523RW940DMW

KOM 100 SF 1500 IP23 9NW RF WFL DA MA/WH



PHOTOMETRIC DATA :

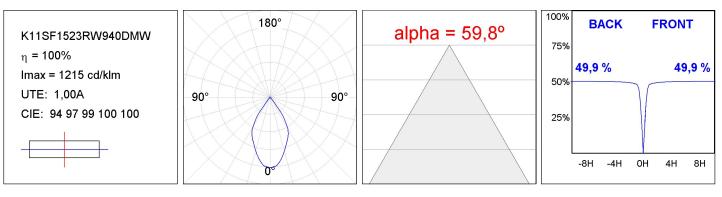

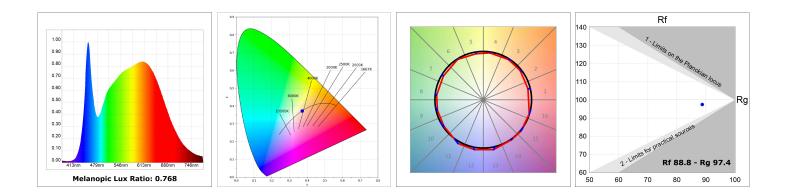

Worktitude for light

Product datasheet

KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code: K11SUADLATBK

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code: K11SUADLATWH

Description: KOMBIC 100 SF ADAPT. LATERAL CABLE WH

Worktitude for light